



Compaq Presario CQ62 Motherboard Replacement

Motherboard replacement guide for the Compaq Presario CQ62.

Written By: Carsten Dahl Hjarup



INTRODUCTION


This is a motherboard replacement guide for the Compaq Presario CQ62. This guide will give step by step instructions on how to disassemble and replace your motherboard.



TOOLS:



- [Spudger](#) (1)
 - [Flathead Screwdriver](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Motherboard

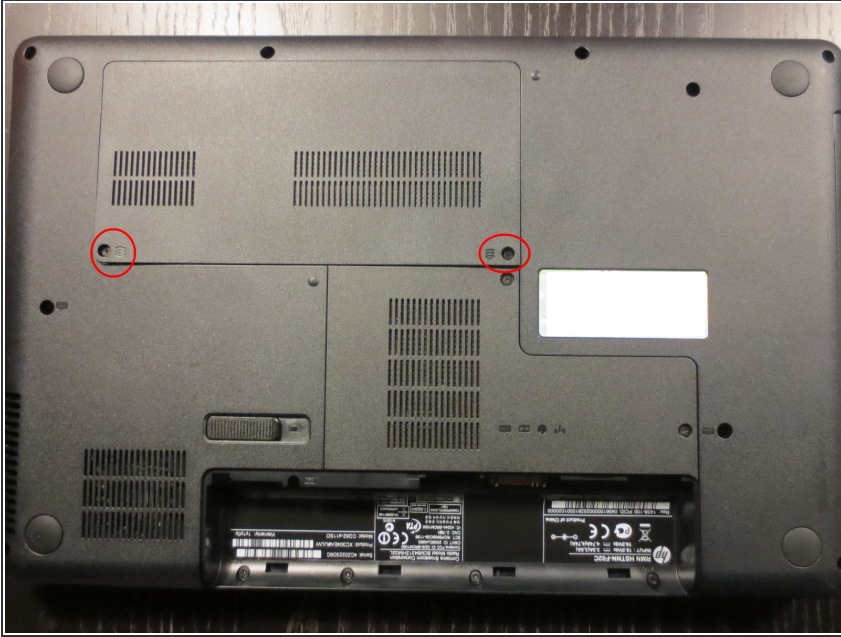


- Remove the two M2.5x5 screws securing the cover of the hard drive.

Step 2

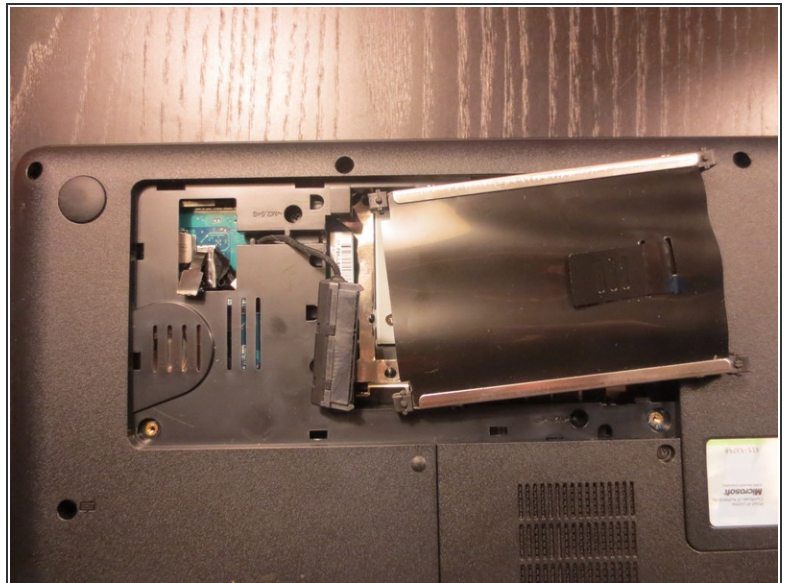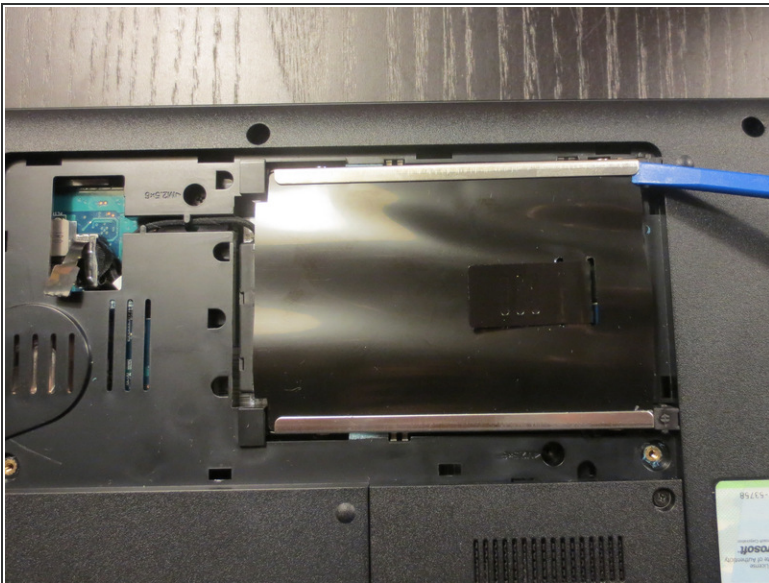

- Remove harddrive by pushing upwards on metal supports.
- When free, release harddrive connector.

Step 3

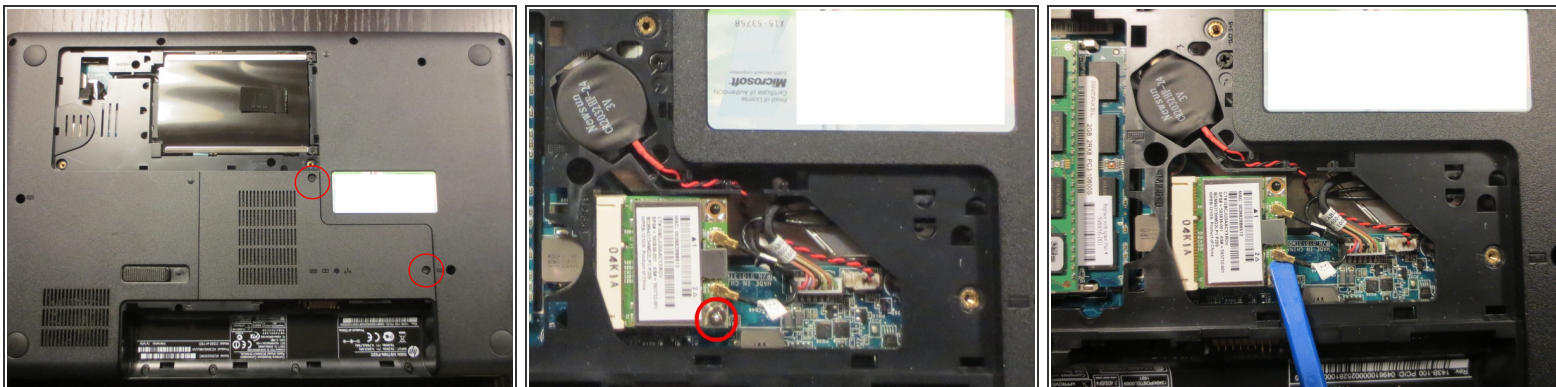


- unscrew two screws holding lid for WLAN & RAM
- remove screw holding WLAN module in place
- Release the two RF connectors on the WLAN module.

Step 4





- Lift up wlan module to 45 degrees, and pull it gently out.

Step 5

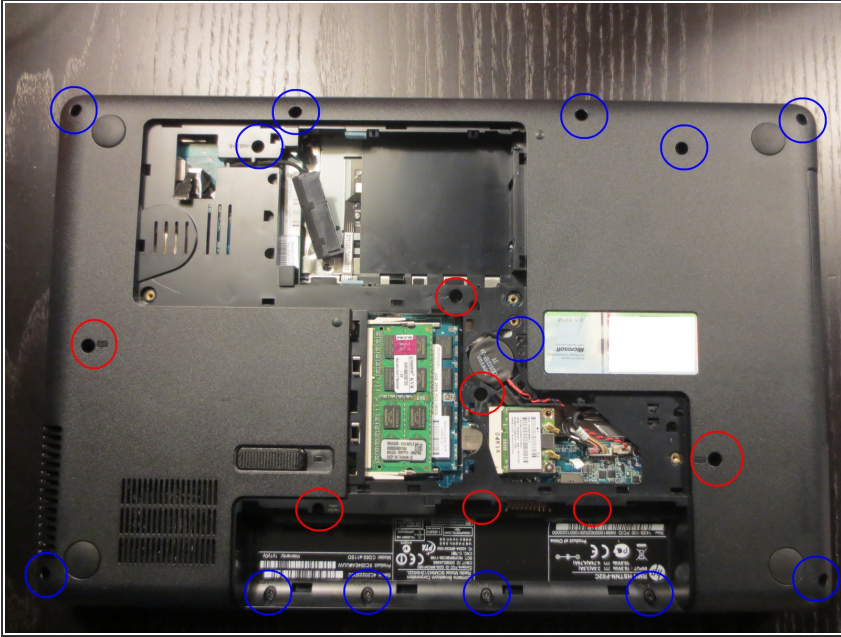

- Remove bottom screws.
- The seven marked in red color is holding the keyboard.

Step 6

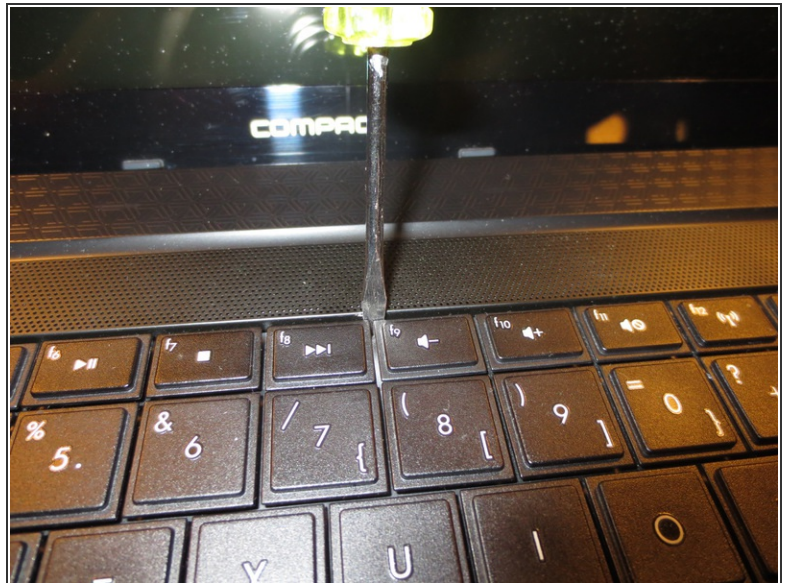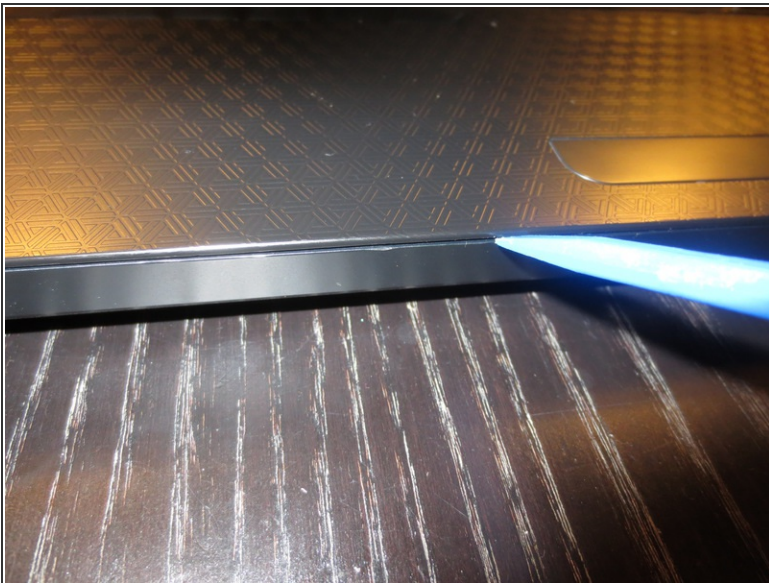

- To remove keyboard, use spudger to release the snaps between casing and keyboard top. All the way around the product except LDC area.
- with a spudger or small flat screw driver firmly press the keyboard from F-keys row downwards toward space key.

Step 7



- When pressing down on the keyboard the force must overcome the adhesive.
- When lifting out keyboard be mindfull on the keyboard flex, that need to be disconnected when keyboard is loose.
- remove the flex'es by opening the connectors and remove them (5 in total).
- Remove 3 screws (marked Red)
- Finally the top cover can be removed with a spudger.

To reassemble your device, follow these instructions in reverse order. To dissassemble the logic board see the other ifixit guide for this laptop.

This document was last generated on 2017-06-29 11:14:56 AM.